



WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

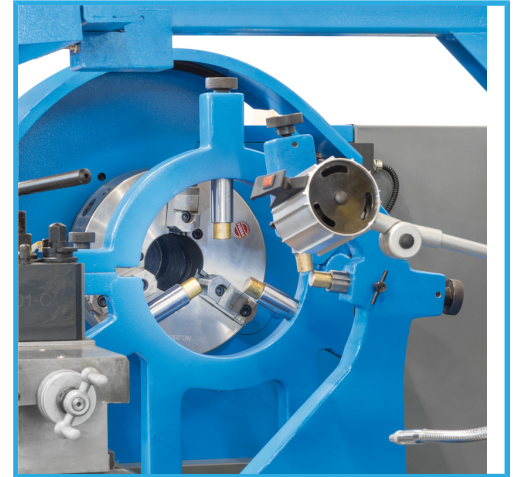

FERVIplus

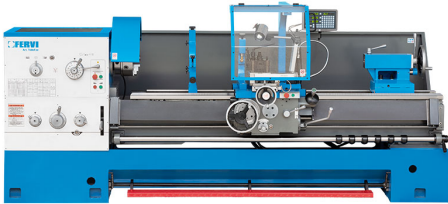

Centers height	330 mm
Max swing over the bed	660 mm
Max swing over the cross slide	420 mm
Max swing over the gap	870 mm
Tool height	32 mm
Distance between centers	1500 mm
Spindle bore	105 mm
Spindle nose Camlock	Camlock D1-8
Spindle speed	(12) 36 - 1600 rpm
Longitudinal feeds	0,063 - 2,52 mm/rev
Cross feeds	0,027 - 1,07 mm/rev
Metric threads	(22) 1 - 14 mm
Inch threads	(26) 2 - 28 TPI
Tailstock taper MT	5
Motor	400V 50/60 Hz 7,5 kW
Cooling pump	400V 50/60 Hz 90 W
Dimensions	3000 x 1400 x 1600 mm
Net weight	3330 Kg
EAN Code	8012667402150
Packaging dimensions	3000 x 1400 x 1600h mm
Gross weight	3300,00 kg

Included

3 reversible jaw self centering chuck Ø 320 mm
 4 independent jaw chuck Ø 400 mm
 Face plate Ø 600 mm
 Follow rest
 Follow rest
 Live center MT 5
 Thread dial
 Leadscrew hood
 Tool post guard
 Chuck safeguard
 Full length splash guard
 Italy style quick change tool post type C
 Working LED lamp
 Cooling system
 Electromechanical foot brake
 Tailstock carriage a quick locking
 Wagon gears in oil bath
 Adjustable leveling feet