



WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

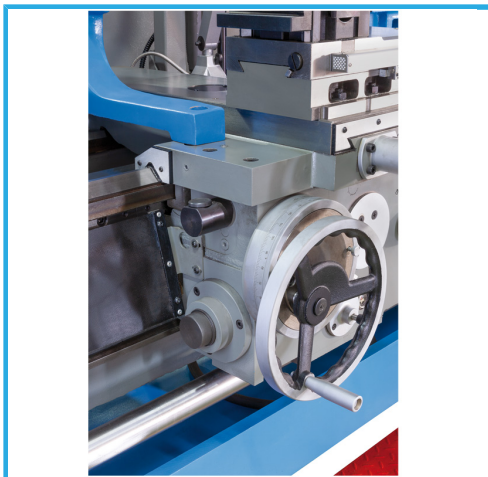

FERVIplus

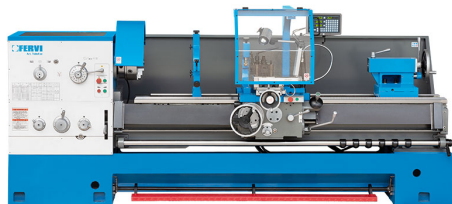

Centers height	250 mm
Max swing over the bed	500 mm
Max swing over the cross slide	310 mm
Max swing over the gap	720 mm
Tool height	32 mm
Distance between centers	1000 mm
Spindle bore	80 mm
Spindle nose Camlock	Camlock D1-8
Spindle bore taper MT	7
Spindle speed	(12) 36 - 1600 rpm
Longitudinal feeds	0,063 - 2,52 mm/giro
Cross feeds	0,063 - 2,52 mm/rev
Metric threads	(22) 1 - 14 mm
Inch threads	(26) 2 - 28 TPI
Tailstock taper MT	5
Motor	400V 50/60 Hz 7,5 kW
Cooling pump	400V 50/60 Hz 90 W
Dimensions	2500 x 1400 x 1500 mm
Net weight	2840 Kg
Packaging dimensions	2500 x 1400x 1500h mm
Gross weight	3555,00 kg
EAN Code	8012667402006

Included

3 reversible jaw self centering chuck Ø 250 mm
4 independent jaw chuck Ø 320 mm
Reduction sleeve MT 7/5
Face plate Ø 400 mm
Follow rest
Steady rest
2 x Dead center MT 5
Live center MT 5
Thread dial
Leadscrew hood
Turret guard
Chuck safeguard
Full length splash guard
Italy style quick change tool post type C
Working LED lamp
Cooling system
Electromechanical foot brake
Tailstock carriage a quick locking
Wagon gears in oil bath
Adjustable leveling feet