


WITH 2 SPEED MOTOR AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.



FERVIplus

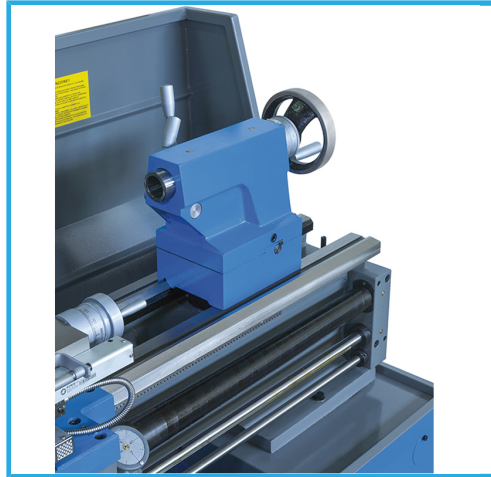

Centers height	200 mm
Max swing over the bed	400 mm
Max swing over the cross slide	258 mm
Max swing over the gap	550 mm
Tool height	20 mm
Distance between centers	1000 mm
Spindle bore	55 mm
Spindle bore	50 mm
Spindle nose Camlock	Camlock D1-5
Spindle bore taper MT	6
Spindle speed	(12) 45 - 2000 rpm
Longitudinal feeds	0,06 - 2,78 mm/rev
Cross feeds	0,01 - 0,72 mm/rev
Metric threads	0,8 - 14 mm
Inch threads	2 - 28 TPI
Tailstock taper MT	4
Motor	400V 50 Hz 1,5 / 2,4 kW
Dimensions	1860 x 800 x 1600 h mm
Net weight	760 kg
Packaging dimensions	1930 x 760 x 1600h mm
Gross weight	815,00 kg
EAN Code	8012667247331

Included

3+3 jaw self centering chuck Ø 200 mm
 4 independent jaw chuck Ø 200 mm
 Reduction sleeve MT 6/4
 Face plate Ø 320 mm
 Follow rest
 Steady rest
 2 x Dead center MT 4
 Live center MT 4
 Thread dial
 Leadscrew hood
 Turret guard
 Chuck safeguard
 Full length splash guard
 TOAB quick change tool post
 Working lamp
 Cooling system
 Foot brake
 Clutch on turning bar
 Quick locking tailstock carriage
 Wagon gears in oil bath