


MAINLY USED IN LATHES WITH THE AIM OF STABILIZING LONG AND THIN PIECES, MORE SUBJECT TO BENDING OR UNCONTROLLED OSCILLATION...



<b>Spindle taper</b>	2
<b>A</b>	L2 39 mm - D2-D3 16 mm - $\hat{I} \pm 60^\circ$ mm
<b>B</b>	L2 35,5 mm - D2-D3 16 mm - $\hat{I} \pm 75^\circ$ mm
<b>C</b>	L2 33 mm - D2-D3 16 mm - $\hat{I} \pm 90^\circ$ mm
<b>D</b>	L2 46 mm - D2-D3 16 mm - $\hat{I} \pm 60^\circ$ mm
<b>E</b>	L2 40 mm - D2-D3 25 mm / 10 mm - $\hat{I} \pm 60^\circ$ mm
<b>F</b>	L2 36 mm - D2-D3 16 mm / 10 mm - $\hat{I} \pm 60^\circ$ mm
<b>G</b>	L2 39 mm - D2-D3 20 mm / 16 mm - $\hat{I} \pm 60^\circ$ mm
<b>rpm max</b>	5000 g/min
<b>Maximum capacity</b>	45 kg
<b>Gross weight</b>	1,32 kg
<b>Packaging dimensions</b>	305x165x70h mm
<b>EAN Code</b>	8012667244682

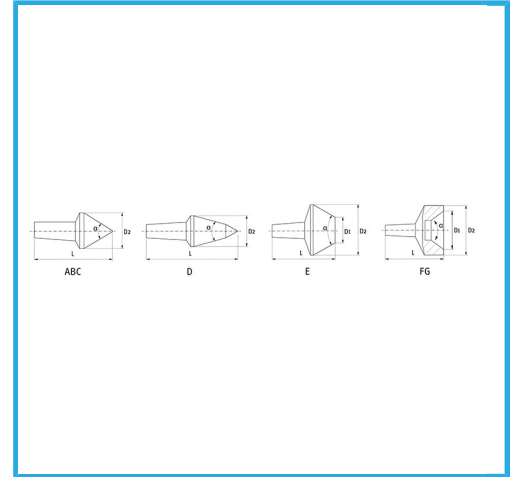

Carrying case



Tempered



9 Pcs



Steel



Grounded