


SE UTILIZA PRINCIPALMENTE EN TORNOS CON EL OBJETIVO DE ESTABILIZAR PIEZAS LARGAS Y DELGADAS, MÁS SUJETAS A FLEXIONES U...



€190,00

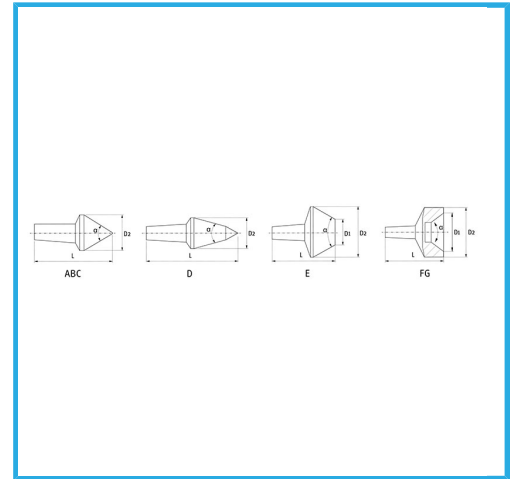

**Cono mordazas**

	2
A	L2 39 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm
B	L2 35,5 mm - D2-D3 16 mm - $\hat{I}\pm 75^\circ$ mm
C	L2 33 mm - D2-D3 16 mm - $\hat{I}\pm 90^\circ$ mm
D	L2 46 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm
E	L2 40 mm - D2-D3 25 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm
F	L2 36 mm - D2-D3 16 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm
G	L2 39 mm - D2-D3 20 mm / 16 mm - $\hat{I}\pm 60^\circ$ mm

<b>Máx. r.p.m.</b>	5000 g/min
<b>Capacidad máx.</b>	45 kg
<b>Peso bruto</b>	1,32 kg
<b>Dimensiones de embalaje</b>	305x165x70h mm
<b>Codigo de barras</b>	8012667244682



Estuche de transporte



Templado



9 Pcs



Acero



Rectificado