


HAUPTSÄCHLICH IN DREHMASCHINEN MIT DEM ZIEL VERWENDET,
 LANGE UND DÜNNE TEILE ZU STABILISIEREN, DIE STÄRKEREN...

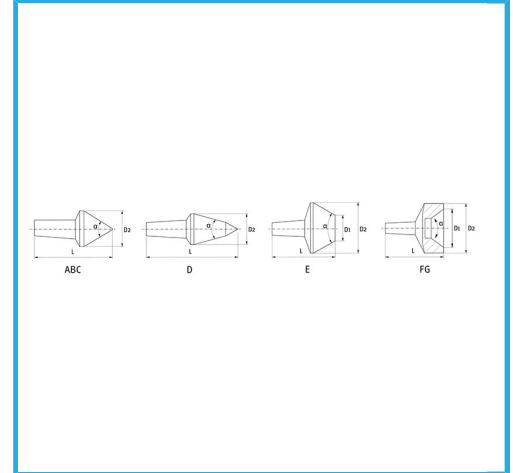

konische Schraubstöcke

A	3
B	L2 48 mm - D2-D3 20 mm - $\hat{I} \pm 60^\circ$ mm
C	L2 43,5 mm - D2-D3 20 mm - $\hat{I} \pm 75^\circ$ mm
D	L2 40,5 mm - D2-D3 20 mm - $\hat{I} \pm 90^\circ$ mm
E	L2 56 mm - D2-D3 18 mm - $\hat{I} \pm 60^\circ$ mm
F	L2 50 mm - D2-D3 35 mm / 15 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 42 mm - D2-D3 22 mm / 18 mm - $\hat{I} \pm 60^\circ$ mm
	L2 48 mm - D2-D3 35 mm / 30 mm - $\hat{I} \pm 60^\circ$ mm

max. Drehzahl	5000 g/min
max. Kapazität	150 kg
Bruttogewicht	2,18 kg
Verpackungsmaße	355x180x75 h mm
EAN-Code	8012667205201



Koffer



9 Pcs



Gehärtet



Gehärteter



Stahl