


MAINLY USED IN LATHES WITH THE AIM OF STABILIZING LONG AND THIN PIECES, MORE SUBJECT TO BENDING OR UNCONTROLLED OSCILLATION...



Spindle taper	3
A	L2 48 mm - D2-D3 20 mm - $\hat{I} \pm 60^\circ$ mm
B	L2 43,5 mm - D2-D3 20 mm - $\hat{I} \pm 75^\circ$ mm
C	L2 40,5 mm - D2-D3 20 mm - $\hat{I} \pm 90^\circ$ mm
D	L2 56 mm - D2-D3 18 mm - $\hat{I} \pm 60^\circ$ mm
E	L2 50 mm - D2-D3 35 mm / 15 mm - $\hat{I} \pm 60^\circ$ mm
F	L2 42 mm - D2-D3 22 mm / 18 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 48 mm - D2-D3 35 mm / 30 mm - $\hat{I} \pm 60^\circ$ mm
rpm max	5000 g/min
Maximum capacity	150 kg
Gross weight	2,18 kg
Packaging dimensions	355x180x75 h mm
EAN Code	8012667205201

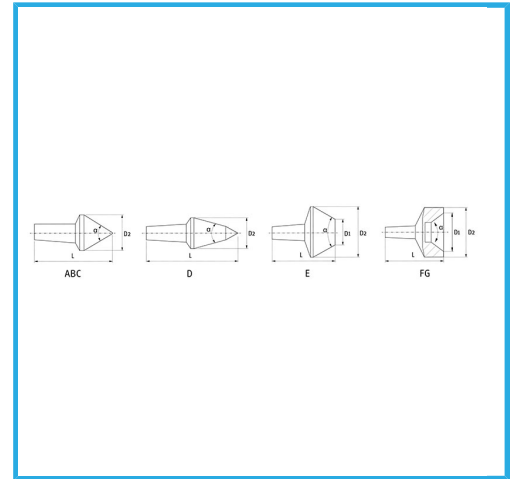

Carrying case



Tempered



9 Pcs



Steel



Grounded