


UTILIZZATE PRINCIPALMENTE NEI TORNİ CON Lé™ OBIETTIVO DI STABILIZZARE I PEZZI LUNGI E SOTTILI, PIÙ SOGGETTI ALLA FLESSIONE O..



€213,00

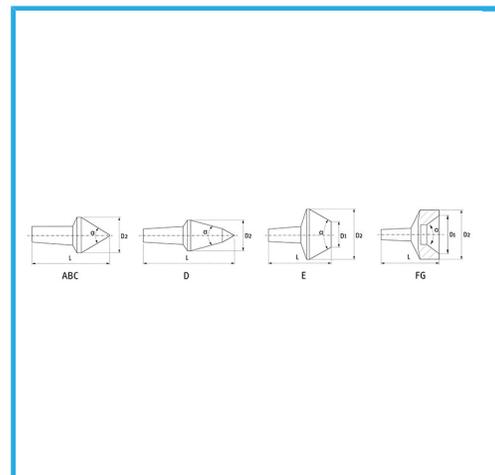

Cono morse	3
A	L2 48 mm - D2-D3 20 mm - $\hat{I}\pm 60^\circ$ mm
B	L2 43,5 mm - D2-D3 20 mm - $\hat{I}\pm 75^\circ$ mm
C	L2 40,5 mm - D2-D3 20 mm - $\hat{I}\pm 90^\circ$ mm
D	L2 56 mm - D2-D3 18 mm - $\hat{I}\pm 60^\circ$ mm
E	L2 50 mm - D2-D3 35 mm / 15 mm - $\hat{I}\pm 60^\circ$ mm
F	L2 42 mm - D2-D3 22 mm / 18 mm - $\hat{I}\pm 60^\circ$ mm
G	L2 48 mm - D2-D3 35 mm / 30 mm - $\hat{I}\pm 60^\circ$ mm
Max rpm	5000 g/min
Portata max	150 kg
Peso lordo	2,18 kg
Dimensioni imballo	355x180x75 h mm
Codice EAN	8012667205201



Valigetta



Temprato



9 Pcs



Acciaio



Rettificato