


MAINLY USED IN LATHES WITH THE AIM OF STABILIZING LONG AND THIN PIECES, MORE SUBJECT TO BENDING OR UNCONTROLLED OSCILLATION...

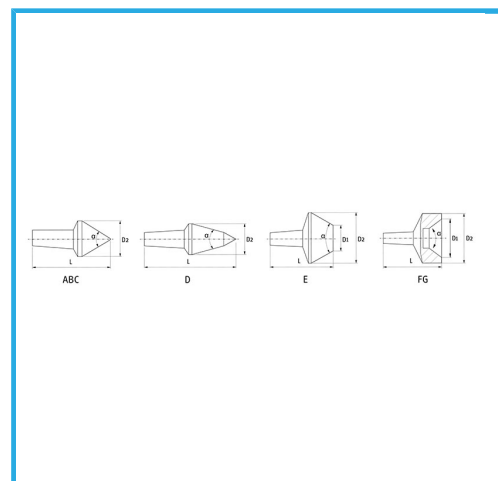

Spindle taper

A	4	L2 61,5 mm - D2-D3 28 mm - $\hat{I}\pm 60^\circ$ mm
B		L2 55,5 mm - D2-D3 28 mm - $\hat{I}\pm 75^\circ$ mm
C		L2 51,5 mm - D2-D3 28 mm - $\hat{I}\pm 90^\circ$ mm
D		L2 69 mm - D2-D3 26 mm - $\hat{I}\pm 60^\circ$ mm
E		L2 61,5 mm - D2-D3 50 mm / 28 mm - $\hat{I}\pm 60^\circ$ mm
F		L2 55 mm - D2-D3 40 mm / 35 mm - $\hat{I}\pm 60^\circ$ mm
G		L2 60 mm - D2-D3 55 mm / 48 mm - $\hat{I}\pm 60^\circ$ mm

rpm max	5000 g/min
Maximum capacity	240 kg
Gross weight	3,88 kg
Packaging dimensions	380x225x110 h mm
EAN Code	8012667011178



Carrying case



Tempered



9 Pcs



Steel



Grounded