


SE UTILIZA PRINCIPALMENTE EN TORNOS CON EL OBJETIVO DE ESTABILIZAR PIEZAS LARGAS Y DELGADAS, MÁS SUJETAS A FLEXIONES U...



€309,00

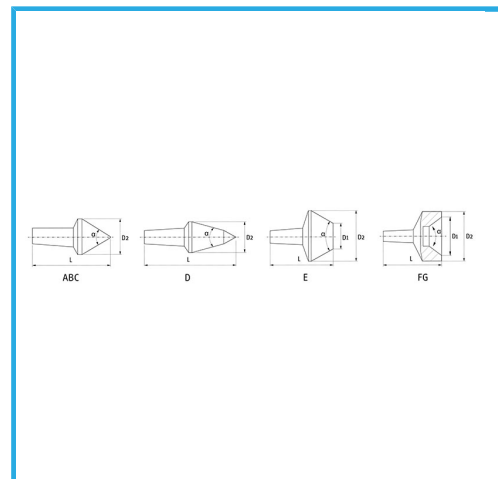

**Cono mordazas**

	4
A	L2 61,5 mm - D2-D3 28 mm - $\hat{I}\pm 60^\circ$ mm
B	L2 55,5 mm - D2-D3 28 mm - $\hat{I}\pm 75^\circ$ mm
C	L2 51,5 mm - D2-D3 28 mm - $\hat{I}\pm 90^\circ$ mm
D	L2 69 mm - D2-D3 26 mm - $\hat{I}\pm 60^\circ$ mm
E	L2 61,5 mm - D2-D3 50 mm / 28 mm - $\hat{I}\pm 60^\circ$ mm
F	L2 55 mm - D2-D3 40 mm / 35 mm - $\hat{I}\pm 60^\circ$ mm
G	L2 60 mm - D2-D3 55 mm / 48 mm - $\hat{I}\pm 60^\circ$ mm

<b>Máx. r.p.m.</b>	5000 g/min
<b>Capacidad máx.</b>	240 kg
<b>Peso bruto</b>	3,88 kg
<b>Dimensiones de embalaje</b>	380x225x110 h mm
<b>Codigo de barras</b>	8012667011178



Estuche de transporte



Templado



9 Pcs



Acero



Rectificado