


UTILIZZATE PRINCIPALMENTE NEI TORNİ CON L&eacaron™ OBIETTIVO DI STABILIZZARE I PEZZI LUNGI E SOTTILI, PIÙ SOGGETTI ALLA FLESSIONE O..



€309,00

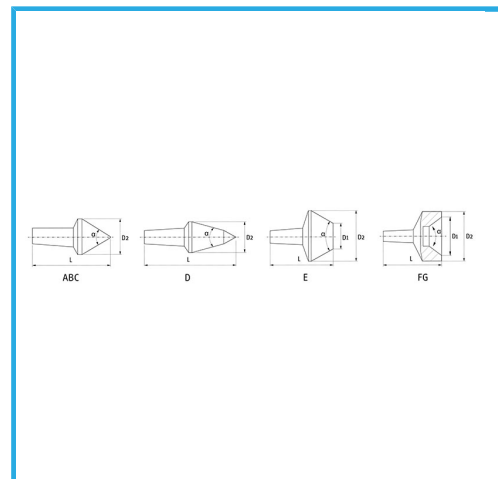

<b>Cono morse</b>	4
<b>A</b>	L2 61,5 mm - D2-D3 28 mm - $\hat{I}\pm 60^\circ$ mm
<b>B</b>	L2 55,5 mm - D2-D3 28 mm - $\hat{I}\pm 75^\circ$ mm
<b>C</b>	L2 51,5 mm - D2-D3 28 mm - $\hat{I}\pm 90^\circ$ mm
<b>D</b>	L2 69 mm - D2-D3 26 mm - $\hat{I}\pm 60^\circ$ mm
<b>E</b>	L2 61,5 mm - D2-D3 50 mm / 28 mm - $\hat{I}\pm 60^\circ$ mm
<b>F</b>	L2 55 mm - D2-D3 40 mm / 35 mm - $\hat{I}\pm 60^\circ$ mm
<b>G</b>	L2 60 mm - D2-D3 55 mm / 48 mm - $\hat{I}\pm 60^\circ$ mm
<b>Max rpm</b>	5000 g/min
<b>Portata max</b>	240 kg
<b>Peso lordo</b>	3,88 kg
<b>Dimensioni imballo</b>	380x225x110 h mm
<b>Codice EAN</b>	8012667011178



Valigetta



Temprato



9 Pcs



Acciaio



Rettificato