



TO SLIGHTLY CORRECT THE AXIALITY AND DIAMETER OF THE HOLES.  
 IT CAN WORK AUTOMATICALLY AND MANUALLY.

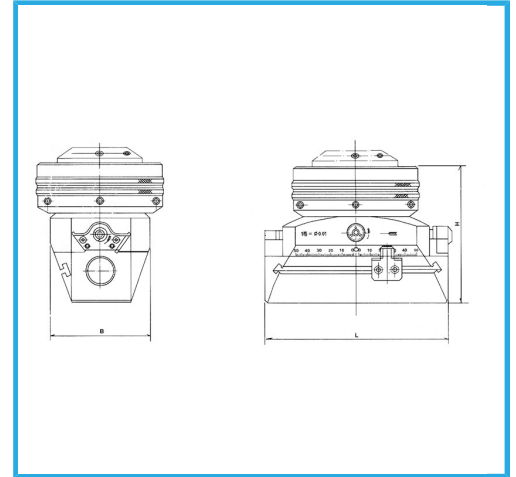

<b>Max facing and boring <math>\varnothing</math></b>	450 mm
<b>Max stroke of slide</b>	$\pm 50$ mm
<b>Fine feed per graduation</b>	0,005 mm
<b>Manual feed per revolution</b>	3 mm
<b>Self acting feed per revolution</b>	0,03-0,06-0,09 0,12-0,15-0,18 mm
<b><math>\varnothing</math> of tool post holes in head</b>	22 mm
<b>Max <math>\varnothing</math> of head</b>	168 mm
<b>Height of head without shank - (H)</b>	118 mm
<b>Weight of head without shank</b>	7,8 kg
<b>Length of sliding block</b>	160 (L) mm
<b>Width of sliding block</b>	90 (B) mm
<b>Collets hole</b>	8 - 10 - 12 - 14 $\varnothing$ mm
<b>Accessories</b>	1 - 2 - 3 - 4 - 5
<b>Extension hole for tool holder</b>	$\varnothing 10$ mm
<b>Shank</b>	ISO40 - DIN2080
<b>Gross weight</b>	17,56 kg
<b>Packaging dimensions</b>	-
<b>EAN Code</b>	8012667002923

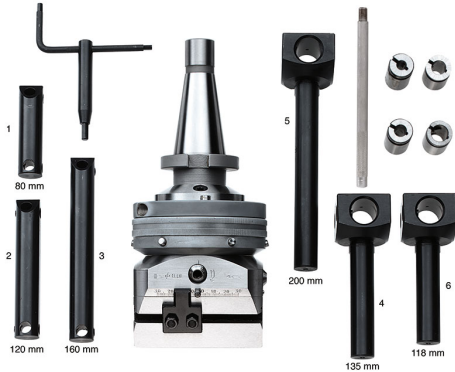

Box

40 Cr



Grounded