


BENCH LATHE SEMI NORTON GEAR BOX AND BELT DRIVE, CHANGE, LONGITUDINAL AND CROSS FEEDS, TURNING, LEADSCREW, PARTIALLY ASSEMBLED...

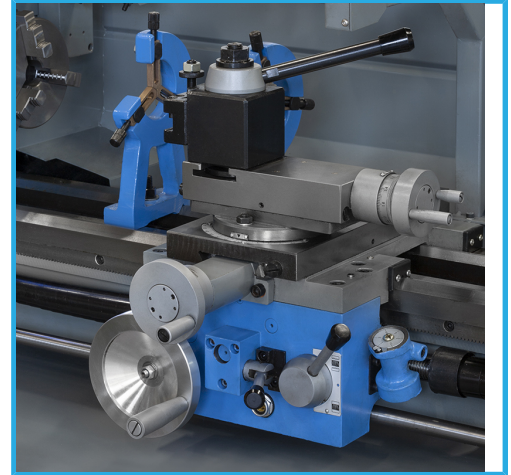

Centers height	160 mm
Max swing over the bed	290 mm
Max swing over the cross slide	175 mm
Tool height	20 mm
Max length of workpiece	750 mm
Spindle bore	38 mm
Spindle nose Camlock	Camlock D1-4
Spindle bore taper MT	5
Variable spindle speed	75 - 500 / 300 - 2000 rpm
Longitudinal feeds	0,07 - 1,0 mm/rev
Cross feeds	0,0017 - 0,25 mm/rev
Metric threads	(18) 0,2 - 3,5 mm
Inch threads	(21) 8 - 56 TPI
Tailstock taper MT	3
Motor	Three-phased 230 V 1.1 kW
Single-phase power supply	230 V 50 / 60 Hz
Dimensions	1450 x 720 x 1280 mm
Net weight	310 kg
Packaging dimensions	1500 x 750 x 1090 h mm
Gross weight	338,00 kg
EAN Code	8012667312237

Included

- 3+3 jaw self centering chuck Ø 125 mm
- 4 Reversible independent jaws chuck Ø 160 mm
- Face plate Ø 200 mm
- Flange for 4-jaw chuck Ø 160 mm
- Follow rest
- Steady rest
- Dead center MT 3
- Dead center MT 5
- Clutch on turning bar
- Thread dial
- Leadscrew hood
- Turret safeguard with micro switch
- Chuck safeguard with micro switch
- Full length splash guard
- Quick change tool post T0AE
- LED light