


MINI LATHE WITH AUTOMATIC LONGITUDINAL FEEDS AND VARIABLE SPEED SHOWN ON DIGITAL DISPLAY. WITH METAL GEARS.

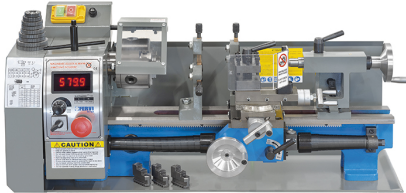

<b>Centers height</b>	105 mm
<b>Max swing over the bed</b>	210 mm
<b>Max swing over the cross slide</b>	140 mm
<b>Tool height</b>	12 mm
<b>Max length of workpiece</b>	400 mm
<b>Spindle bore</b>	21 mm
<b>Spindle bore taper MT</b>	3
<b>Variable spindle speed</b>	50 - 1100 rpm   100 - 2500 rpm
<b>Longitudinal feeds</b>	0.083 - 0.175 mm / giro
<b>Metric threads</b>	(9) 0,5 - 2,5 mm
<b>Tailstock taper MT</b>	2
<b>Motor</b>	230 V 50 Hz 0,6 kW
<b>Dimensions</b>	780 x 300 x 340 h mm
<b>Net weight</b>	49 kg
<b>Gross weight</b>	60,00 kg
<b>EAN Code</b>	8012667362096
<b>Packaging dimensions</b>	810x375x445 h mm

**Included**

3+3 jaw self centering chuck Ø 100 mm  
Follow rest  
Steady rest  
Dead center MT 2  
Live center MT 2  
Thread dial  
Turret safeguard  
Chuck safeguard  
Leadscrew hood  
Full length splash guard  
4 side fix tool post 10 mm  
Quick stop tailstock